

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER

Case 96
(1170/39383)

U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5)

09/856412

INTERNATIONAL APPLICATION NO.

PCT/NZ99/00193

INTERNATIONAL FILING DATE

17 NOVEMBER 1999

PRIORITY DATE CLAIMED

17 NOVEMBER 1998

TITLE OF INVENTION

LAUNDRY MACHINE

APPLICANT(S) FOR DO/EO/US Adam John DARBY, Ian Campbell MCGILL, Lorraine NEVINSON, Laurence Evan SMYTHE, Samuel John Selwyn TAYLOR, Neil CHEYNE, and Jonathan David HARWOOD

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(l).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the specification and claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith in the International Application (required only if not transmitted by the International Bureau).
 - b. ☒ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). (UNEXECUTED)
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
 - a. ☒ International Preliminary Exam. Report
 - b. ☐ Verified Statement (Declaration) Claiming Small Entity Status
 - c. ☒ International Search Report
 - d. ☐ Preliminary Amendment

Certificate of Mailing by "Express Mail"

Mailing Label Number EM165432158USDate of Deposit May 17, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office Box Addressee" service under 35 CFR 1.10 on the date indicated above and is addressed to the Ass. Commissioner for Patents, Washington, D.C. 20231

MELISSA JACOBSON

(TYPED OR PRINTED NAME OF PERSON MAILING PAPER OR FEE)

Melissa Jacobson

(SIGNATURE OF PERSON MAILING PAPER OR FEE)




1603 Rec'd PCT/ITL 17 MAY 2001

U.S. APPLICATION NO (If known, see 37 C F R 1.5) 09/856412		INTERNATIONAL APPLICATION NO PCT/NZ99/00193		ATTORNEY'S DOCKET NUMBER Case 96 (1170/39383)	
17. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO \$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$690.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1,000.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$100.00				CALCULATIONS PTO USE ONLY	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 1,000.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492(e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$ -0-	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	17 - 20 =	0	X \$18.00	\$.00	
Independent claims	6 - 3 =	3	X \$80.00	\$ 240.00	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00	\$ 270.00	
TOTAL OF ABOVE CALCULATIONS =				\$ 510.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$ -0-	
SUBTOTAL =				\$ 1,510.00	
Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492(f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30 +				\$ -0-	
TOTAL NATIONAL FEE =				\$ 1,510.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$ -0-	
TOTAL FEES ENCLOSED =				\$ 1,510.00	
				Amount to be refunded:	\$
				Amount to be charged:	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1,510.00</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 20-1495 in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 20-1495. A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					

SEND ALL CORRESPONDENCE TO:

RAIFORD A. BLACKSTONE, ESQ.
Trexler, Bushnell, Giangiorgi
Blackstone & Marr, Ltd.
105 West Adams Street
Chicago, IL 60603
(312) 704-1890



Signature
Linda L. Palomar

Name
37.903

Registration Number

LAUNDRY MACHINE**TECHNICAL FIELD**

5 This invention relates to laundry machines. In particular it relates to laundry machine drain pump control, power supplies, electronically commutated permanent magnet motor drives and motor braking during spin dry cycles.

BACKGROUND ART

10 Most laundry machine drain pumps use an AC induction motor or synchronous motor, operating off the mains frequency, which is typically 50 or 60Hz. This fixed frequency, along with the mains voltage, determines the design of the pump, and hence the flow rate and maximum head height that can be obtained.

15 There are numerous disadvantages of a fixed mains-frequency pump motor. These are: (a) the starting torque is typically low, making the pump susceptible to being blocked, (b) separate pump designs are needed for countries having differing mains voltage and frequency, (c) the noise level during "ventilation" is high, particularly when running at a supply frequency of 60Hz, (d) the torque varies with the mains voltage and (e) there is no feedback to indicate if the pump is faulty.

20 By the nature of the washing process debris, including strands of textile, is removed from the wash load and flushed into the sump of the washing machine. This debris is then pumped out along with the dirty wash water. Occasionally the pump impeller will catch on the debris, or will start accumulating textile strands and then stop pumping.

25 Problems of this nature have been solved in other industries such as sewage handling, by having powerful motors driving pumps, with large clearances and large flow passages. Home appliances, however, do not have the space available to utilise large flow passages. One small volume solution in use is the vortex impeller, where the impeller has a shroud around it that eliminates the jamming point between vane end and the 'cutwater'. Unfortunately this pump has the disadvantage that it can still become
30 blocked by bundles of fibres that become twisted "ropes" in the centre of the vortex.

35 Traditionally a laundry washing machine is turned off by employing one of two methods. In the first power to the washer is isolated using an expensive mains rated switch which de-energises it and makes power consumption negligible. The switch must be capable of carrying and breaking the total current required at the required voltage. In the second method the machine is made to appear it has been switched off

by removing all power on indications on its control panel. In reality the machine's power usage is the same when it appears to be switched off as when it is switched on. These methods have the respective disadvantages that either a high current and/or voltage rated switch is required or power is consumed unnecessarily when the laundry machine is not in use.

The use of permanent magnet rotor three winding stator motors with electronic commutation of the windings is known. A common way of driving an electronically commutated three phase motor is to configure it in an H-Bridge between two dc rails, as shown in figure 5. The six power transistors Q1 to Q6 energise the motor windings by switching in a particular pattern. It is possible to have a high level of control over the speed and torque of the motor if feedback on the position of the rotor is available to the drive circuit logic which controls the switching pattern. The transistors are switched on by applying a voltage, usually 15V, from gate to source. Because the source voltage varies from 0V to the DC rail voltage, some technique is required to get the signal from the driving logic, which is referenced to 0V, to the high side gate which is referenced to the phase output (A, B, and C).

Common techniques are to use pulse transformers, purpose-designed ICs such as the IR2111, or optocouplers. A typical prior art circuit which employs an optocoupler for driving the high side transistor is shown in Figure 6. When transistor Q2 switches off, noise is generated which tends to pull the optocoupler off. A logic inverter q4 ensures that turn off to the optocoupler means turn off of Q1. Since Q1 should always be off during turn off of Q2, correct operation of the circuit is not compromised. The disadvantage of this conventional optocoupler drive design is that high quality and therefore high cost devices are required.

During laundry machine spin dry cycles the spin tub is rotated at relatively high speed. At the termination of the spin cycle it is desirable to brake the motor to minimise spin tub run down speed. Conventionally this has been achieved by connecting resistors across the motor windings. This technique has the disadvantage that relatively high power resistors are required and these add to the cost of the laundry machine.

DISCLOSURE OF THE INVENTION

It is therefore an object of the present invention to provide a laundry machine having drain pump control, a power supply, a motor drive, and a motor braking system which overcomes the respective disadvantages outlined above.

In a first aspect the invention consists in a method of operating a drain pump in a laundry washing machine during the drain phase of the wash cycle to reduce pump blockages characterised in that:

- (a) the pump is started and run for a first period of time,
- 5 (b) the pump is stopped for a second period of time which is less than 10% of said first period of time, and
- (c) steps (a) and (b) are repeated for the duration of said drain phase.

In a second aspect the invention consists in a method of braking a top loading laundry washing machine spin tub wherein said spin tub is driven by an electronically commutated DC motor, wherein the commutation devices are connected to a DC power supply and have free-wheeling diodes connected in parallel therewith, and wherein said washing machine includes other components having inductive windings,

characterised in that:

commutation of power to the motor windings is terminated,

15 the voltage of the DC power supply is monitored,

and when the DC power supply voltage exceeds a pre-determined value the inductive winding of an unused component in said machine is connected across said DC power supply until the DC power supply voltage reduces below said pre-determined value.

20 In a third aspect the invention consists in a method of powering on and off a laundry washing machine where power is consumed in the form of direct current using a switched mode power supply of the type described in Australian Patent 651408 characterised in that:

an active switching device connected between the base of the lower switch in the motor bridge drive used as part of said switched mode power supply and the lower voltage rail is switched on by a latching circuit to cause the DC power supplies in said machine to be disabled,

the latching circuit comprises a capacitor charged from the high voltage rail for said laundry machine motor in parallel with a transistor biased from the switched mode power supply low voltage rail, and

30 a push button normally off switch connected in parallel with said capacitor is used to discharge said capacitor to disable said latching circuit to thereby enable the laundry machine DC power supplies.

35 In a fourth aspect the invention consists in an optocoupler drive circuit for the high side of a totem pole power transistor pair in a bridge circuit for commutating a motor characterised in that the optocoupler does not use a logic inverter on the output side and

the optocoupler transistor is controlled to limit the speed of turn off and thus the speed of turn on of the upper power transistor in the totem pole.

In a fifth aspect the invention consists in a laundry washing machine including a wash bowl drain pump characterised in that:

5 said pump is driven by a variable speed motor which in turn is driven by a variable frequency pulse width modulated inverter,

and the pump motor frequency is decreased at low bowl water levels to reduce the effects of ventilation.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a plan view of a laundry machine sludge pump,

Figure 2 shows alternative impellers for the sludge pump.

Figure 3 shows a voltage waveform for a laundry machine sludge pump controlled in accordance with the present invention,

15 Figure 4 shows a circuit for a laundry machine power supply derived from the laundry machine motor drive,

Figure 5 shows a totem pole switching circuit for a three phase motor drive,

Figure 6 shows a high side drive circuit using an optocoupler for the circuit of Figure 5,

20 Figure 7 shows a high side optocoupler drive circuit according to the present invention, and

Figure 8 shows a braking circuit for a laundry machine motor.

BEST MODES FOR CARRYING OUT THE INVENTION

25 Pump stopping to clear lint and thus prevent pump blocks

In a first embodiment of this invention there is provided a method of drain pump motor control that will flush through bundles of fibres before they become large enough to jam the pump. Typically the pump motor will be an ac induction motor which may be of the shaded pole type. Figure 1 shows the plan view of a laundry machine sludge pump, with the impeller 1 having two, backwardly inclined vanes 2, 3, with large clearances, especially to the cutwater 4. Figure 2a shows a perspective view of sludge impeller 1. An alternative vortex impeller 5 (Figure 2b) may be used to reduce pump noise. It has vane recessed into the impeller.

35 The method of operation involves stopping the pump very quickly for a short period of time every few seconds. The sudden stop of the pump means that there is no more energy put into the vortex, and the momentum of the water flowing down the

discharge pipe sucks the vortex and any fibres entrapped in the vortex out the pump exit. The pump is started again before the velocity in the discharge pipe reduces to zero so that the trapped fibres carry on out into the drain. If the pump off time is too long the discharge flow will stop and then reverses returning the fibres to the pump.

5 To achieve the sudden stop, a direct current is applied to the shaded pole (asynchronous) motor for 200mS. This current produces a stationary flux that acts as a brake. It has been found experimentally that a stop for 200mS every 10 seconds gives the best results.

10 In one embodiment of this invention the shaded pole motor has half wave rectified voltage applied to produce the stationary flux. Figure 3 shows the voltage history of this half wave rectified version, with interval 6 the first 200mS stop interval, then a ten second (full wave) pumping period, 7 followed by a second 200mS stop period 8.

Variable Speed Induction Motor Drain Pump

15 The laundry machine drain pump motor 15 of the present invention is driven from four switching devices 11 to 14 in an "H-bridge" configuration as shown in Figure 4 to switch a 230V / 50Hz AC induction motor for the above described drain pump from a 325V DC rail (peak value of 230 volt RMS mains voltage), under the control of a microprocessor (not shown). The switching signals are pulse width modulated with a variable duty cycle. This allows the frequency and RMS voltage being applied to the pump to be controlled.

Variable Speed Pumping during drain

25 When the water level in the laundry machine bowl is above a predetermined height - the "bowl float level" in a machine of the type described in New Zealand patent 215389/217623/218356 - the pump speed is set to 60Hz, to maximise the flow rate. This is achieved by programming the microprocessor which controls the switching frequency of the H bridge switching devices. When water level is below this predetermined height, "ventilation" will occur. The microprocessor is programmed to drive 50Hz at such water levels. This reduction in speed reduces the noise level of the pump considerably, but still allows pumping over an acceptable head height.

30 The variable speed pumping described has three main advantages over fixed speed pumps:

35 (a) the drain time at 60Hz is approximately 15% less than at 50Hz, due to the higher flow rate to reduce a typical cycle time by about 1-2 minutes,

(b) audible noise is greatly reduced during "ventilation" by slowing the pump to 50Hz, and (c) the same 230VAC / 50Hz pump design can be used irrespective of country in which the laundry machine is used.

5 *Low frequency, high torque pump startup*

To overcome the problem of the starting torque of AC induction motors being increases when the supply frequency is decreased in the present invention, when the pump starts, the drain pump microprocessor switches the H bridge devices 11 to 14 to produce a 30Hz drive current to the pump motor but with an increased PWM duty cycle, for the first four revolutions (ie. 80ms at 50Hz). This provides a high torque "kick", which will attempt to dislodge anything which is impeding the pump impeller.

The microprocessor subsequently controls the H bridge devices to produce a drive current at the target frequency (50 or 60Hz), but with a high PWM duty cycle, for the next 150 revolutions (3 seconds at 50Hz). This helps to initially get the water over the required head height.

After these two "startup" phases, the microprocessor causes the PWM duty cycle to revert to the "normal" duty cycle for the desired drive frequency.

By programming the microprocessor to control the frequency and duty cycle during pump startup in this manner a reduction in pump blockage can be achieved.

20 *Variable pump PWM depending on mains voltage*

The nominal AC mains RMS voltage has a typical tolerance of 10%, which for nominal 230V AC, equates to a range of 207 to 253 volts. In rural areas, this variation can be even greater. This mains voltage variation has an effect on the current supply to the drain pump and thus the torque of the drain pump. The maximum head height and flow rate of the pump can therefore vary depending on the location of the laundry machine.

In this invention, the microprocessor is also caused to measure the DC rail voltage, and from this determine the mains voltage. The microprocessor is programmed to compensate for differing mains voltages by adjusting the duty cycle of the drive signal supplied to the pump motor. If the AC mains voltage is reduced, the duty cycle is increased, and vice versa, thereby ensuring a constant torque in the drain pump over a wide range of mains conditions.

When driving the pump at 60Hz, the maximum torque available is less than when driving at 50Hz. If the pump is operating at 60Hz, and the mains voltage drops below a predetermined level (200V for nominal 230V), the flow rate will drop to an

- 7 -

unacceptable level. In the present invention the microprocessor is programmed to reduce the frequency of the pump drive current to 50Hz, and 60Hz operation disabled until the microprocessor is reset.

By using variable duty cycle that is caused to vary as a function of mains voltage, a constant drain pump performance is maintained over a wider range of actual mains voltages than is normally possible. Secondly, by disabling the 60Hz mode of operation when the mains drops below a predetermined voltage, the problem of very low flow rates is avoided when attempting to drain at 60Hz under low mains conditions.

Pump Over-current Detection

Washing machine drain pumps are susceptible to water damage if they leak. This water damage eventually causes electrical shorting of the pump windings increasing the winding current and causing the pump it to overheat and fail, due to the change in winding resistance and inductance characteristics. As well as being a potential fire/smoke risk, this overheating and failure can also damage the hardware that is driving the pump, unless additional protection is provided.

Conventionally, there is no feedback indicative of current in the pump windings, so there is no "early warning" that the pump is being damaged in such circumstances. In the present invention the current peaks in the pump windings are monitored by the microprocessor. The current may typically peak at approximately 1.1A (rms = 650mA). If the microprocessor detects two consecutive current peaks of greater than 2.6A, it is programmed to flag a "pump overcurrent" fault to the pump motor controller microprocessor.

Since the change in electrical characteristics from water damage is gradual, this fault condition will occur and be detected before any other parts of the circuit are damaged, and before the pump becomes a potential fire/smoke hazard. It allows the replacement of a water-damaged pump before any other subsequent damage occurs.

Power Supply ON-OFF

In a third embodiment the invention provides a means of allowing a laundry machine power supply to power down automatically and power up via a low voltage, low current switch. This eliminates the need for a high current and/or voltage rated switch and ensures negligible power consumption when the laundry machine is not in use.

Referring to Figure 4 power supply for the machine is produced by employing a simple switch mode power supply (SMPS) topology that is controlled by a microprocessor 17 and makes use of the main motor windings 15 and motor drive circuit 11 to 14. This general form of laundry machine power supply is described in the applicant's Australian Patent 651408. The power supply is disabled by a hardware circuit (fourth wire circuit). Power down functions are initiated by the micro processor and locked by the fourth wire circuit. Power up functions are initiated by the user via a low voltage, low current push button SW1.

Power down

When the machine has finished a task and has received no further instructions for some defined time period, the microprocessor simply reduces the power output of the SMPS to zero hence powering down the machine. The fourth wire circuit is then enabled to ensure the SMPS does not power up until the user presses the appropriate push button on the control panel. This dramatically reduces the power consumption of the machine compared to that required by hardware lockout circuitry.

Power up

The user presses a power button which disables the fourth wire circuit that is disabling the SMPS. The SMPS then starts up and brings alive the microprocessors. The machine is now ready for use.

In Figure 4 a buck converter is inherent in the H-bridge topology of the motor drive. Assuming that A+ and B- devices 11 and 14 are off when the circuit is run as a buck converter, then the A- device 12 is latched on and B+ device 13 is driven by a PWM signal to control power output. The circuit can be modified by adding the "hardware lock off" circuitry to provide shutdown and start up functions.

Power down

To shut down the SMPS the microprocessor simply turns off the A- device 12 by turning on transistor Tx2. The nominal 15v rail 16 (produced by the SMPS) will drop in voltage and transistor Tx1 previously biased on by the 15v, will turn off allowing capacitor C1 to charge from the high voltage DC rail 18. C1 then latches transistor Tx2 on hard so that the A- device 12 is latched off. Thus the buck converter is disabled.

Power Up

The user presses Sw1 which short circuits and discharges capacitor C1 thus turning off transistor Tx2 allowing the A- device 12 to turn on. The SMPS is then able to start up and produce the 15v rail 16 required to latch transistor Tx1 on. The machine is now ready for use.

The employment of the described microprocessor controlled SMPS has the following advantages:

(a) a cheap low current, low voltage switch to be used to provide power up functions, (b) the power switch can be referenced to the SMPS zero volt rail allowing it to be used for other functions, (c) allowing the SMPS to shut down extends the life time of components and reduces any emissions from the product (i.e. RFI, EMI), (d) provides very low power consumption when not in use, and (e) eliminates transients caused by mains power interruption.

ECM Motor Drive

In a fourth embodiment the present invention provides a low cost high side drive for an H bridge switching circuit for an electronically commutated motor. Such a switching circuit is shown in Figure 5 for commutating a three winding motor.

The present invention provides a more cost effective circuit to that shown in Figure 6. This is shown in Figure 7. Here, turn off of Q2 tends to turn on Q1. The value of resistor R is selected to limit the turn on speed of Q1 so there is no risk of overlap. Because this causes a slewed turn on for Q1, this circuit is only appropriate for switching Q1 at low frequency. Therefore the motor must be energised at audible switching frequencies.

The optocoupler can have relatively low gain and slew rate, which allows the use of a more cost effective device. There is also no need for an inverter such as q4 in Figure 6.

Configuring at least one high side drive as in Figure 7 is necessary to facilitate the power supply ON-OFF concept described in relation to Figure 4.

Braking the Wash Tub Motor

In a fifth embodiment the invention provides a low cost method of braking a laundry machine motor.

One of the functions of a top loading vertical axis washing machine is to spin the wash tub at high rpm to remove excess water from the clothes at the end of the wash cycle. A spinning tub is unsafe for a user to touch so many machines have a

brake function that quickly stops the spinning tub if the access lid is opened. This brake function can be done by different techniques and one technique that is becoming more common is to use regenerative braking from the main drive motor. Using this technique the drive motor effectively acts as a generator during brake and converts the energy from the spinning tub into electrical energy which is typically then converted into heat and dissipated via a dump resistor.

The present invention connects a motor or solenoid installed in the machine for some other purpose across the DC voltage rails for the motor so that the electrical energy generated during braking of the spinning tub can be dissipated in this motor/solenoid impedance saving the cost of additional components needed for a dump resistor or equivalent. The power dissipation component chosen must not be in operation for its primary purpose during braking of the spin tub.

The circuit shown in Figure 8 has a 3 phase brushless DC main motor 21 for driving a laundry machine agitator (not shown) and or spin tub and a water pump powered by an AC induction motor 22 both driven from the HVDC bus. The three winding motor 21 is driven from the six transistor bridge 29 to 34. The pump motor 22 is driven from a four transistor H bridge 23 to 26 which in turn is switched by current steering circuitry 27 under the control of microprocessor 28. When main motor 21 is driven by the angular momentum of the spin tub as a generator, during a brake phase when switching devices 29 to 34 are off, electrical energy is fed back into the HVDC bus through free wheeling diodes 35 to 40 which results in an increase in the bus voltage. The bus voltage is sensed by microprocessor 28. When the bus voltage exceeds 400V DC, the microprocessor through current steering circuitry 27 switches transistors 23 and 26 of the pump H bridge hard on until the bus voltage falls below 390V. In this way the regenerative braking energy is dissipated as heat in the pump motor windings. This heat is dissipated in the pump as power according to the equation:

$$P_{\text{pump}} = I_{\text{pump}}^2 \times R_{\text{pump}} \dots \dots \dots (1)$$

For a pump of this type the motor windings typically have a resistance of approximately 34 ohms. Therefore for a braking power of say 600W, from equation 1, the pump winding current is around 4.2 amps during braking.

The following advantages are achieved by this embodiment of the present invention: (a) a dump resistor and control circuit are eliminated, (b) by turning the pump on after a braking phase the braking energy (heat) can be quickly dissipated by the pump fan, (c) the heat rise due to the energy (heat) being dissipated in the pump

- 11 -

windings is remote to the usually enclosed main motor electronics area where it can be difficult to ventilate and hence cool, and (d) the motor winding inductance reduces the peak currents that would flow in a purely resistive load, and hence the switching transistors.

5 It should be appreciated that other existing laundry machine resistive/inductive components could be utilised in place of the drain pump motor as a means of dissipating power. For example the solenoid in a solenoid controlled valve or other actuator could be used.

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196

ART 34 AMUC

CLAIMS:

1. A method of operating a drain pump in a laundry washing machine during the drain phase of the wash cycle to reduce pump blockages comprising the steps of: (a) starting the pump and running it for a first period of time to produce a discharge of a given flow rate, (b) stopping the pump rapidly and leaving the pump stopped for a second period of time which is less than 10% of said first period of time, and repeating steps (a) and (b) for the duration of said drain phase, said second period of time being such that the flow rate reduces substantially to zero.

2. A method of operating a drain pump in a laundry washing machine during the drain phase of the wash cycle to reduce pump blockages characterised in that:

- (a) the pump is started and run for a first period of time to produce a discharge of a given flow rate,
- (b) the pump is stopped for a second period of time which is less than 10% of said first period of time, said second period of time being such that the flow rate reduces substantially to zero, and
- (c) steps (a) and (b) are repeated for the duration of said drain phase.

3. A method according to either of claims 1 or 2 wherein said second period of time is between 10% and 1% of said first period of time.

4. A method according to any one of the preceding claims wherein the first period of time is approximately 10 seconds and the second period of time is approximately 200 milliseconds.

5. A method according to any one of the preceding claims wherein said pump is driven by an AC induction motor, during said first period of time said motor is supplied with full wave alternating current and during said second period of time is supplied with half wave alternating current.

6. A laundry washing machine including a drain pump operated in accordance with the method of any one of claims 1 to 5.

ART 34 AMDT

- 13 -

7. A method of braking a top loading laundry washing machine spin tub wherein said spin tub is driven by an electronically commutated DC motor, wherein the commutation devices are connected to a DC power supply and have free-wheeling diodes connected in parallel therewith, and wherein said washing machine includes other components having inductive windings,

characterised in that:

commutation of power to the motor windings is terminated,

the voltage of the DC power supply is monitored,

and when the DC power supply voltage exceeds a pre-determined value the inductive winding of an unused component in said machine is connected across said DC power supply until the DC power supply voltage reduces below said pre-determined value.

8. A method according to claim 7 wherein said unused component is a water pump powered by a single phase induction motor, the winding of which is electronically commutated from said DC power supply by bridge connected switching devices, said switching devices are controlled by a microprocessor, the DC power supply voltage is monitored by said microprocessor and said microprocessor causes said switching devices to connect the winding of said pump motor across said DC power supply.

9. A top loading laundry washing machine having a spin tub which is braked according to the method of either one of claims 7 or 8.

10. A method of powering on and off a laundry washing machine where power is consumed in the form of direct current using a switched mode power supply of the type described in Australian Patent 651408 characterised in that:

an active switching device connected between the base of the lower switch in the motor bridge drive used as part of said switched mode power supply and the lower voltage rail is switched on by a latching circuit to cause the DC power supplies in said machine to be disabled,

the latching circuit comprises a capacitor charged from the high voltage rail for said laundry machine motor in parallel with a transistor biased from the switched mode power supply low voltage rail, and

a push button normally off switch connected in parallel with said capacitor is used to discharge said capacitor to disable said latching circuit to thereby enable the laundry machine DC power supplies.

AMENDED SHEET
IP/AU

ART 34 AMUT

- 14 -

11. An optocoupler drive circuit for the high side of a totem pole power transistor pair in a bridge circuit for commutating a motor characterised in that the optocoupler does not use a logic inverter on the output side and the optocoupler transistor is controlled to limit the speed of turn off and thus the speed of turn on of the upper power transistor in the totem pole.

5

12. A laundry washing machine including a wash bowl drain pump characterised in that:

said pump is driven by a variable speed motor which in turn is driven by a variable frequency pulse width modulated inverter,

10

and the pump motor frequency is decreased at low bowl water levels to reduce the effects of ventilation.

13. A laundry machine according to claim 12 wherein the inverter pulse width modulated duty cycle is increased on pump start up and reduced upon normal pump frequency being achieved.

15

14. A laundry machine according to either of claims 12 or 13 wherein the inverter duty cycle is varied as an inverse function of the mains voltage supplying the machine to ensure constant motor torque independent of mains voltage.

20

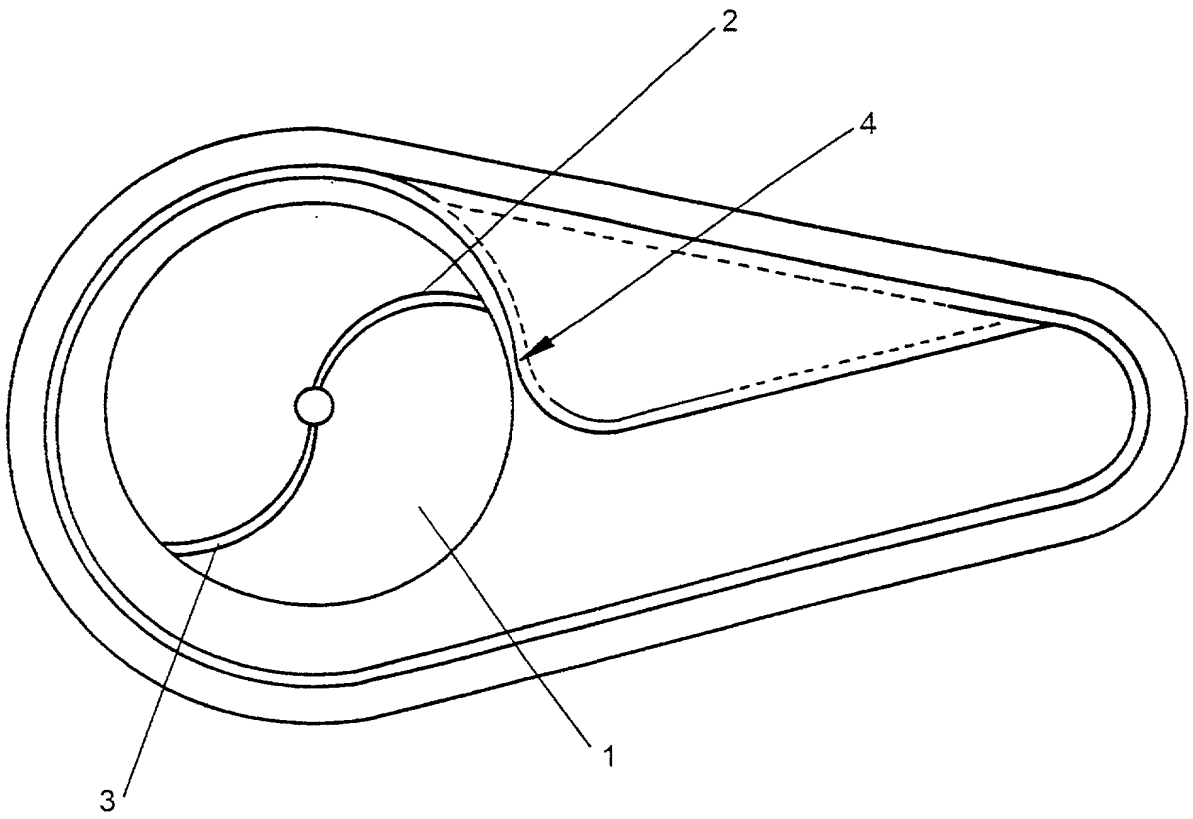


FIG. 1




FIG. 2A

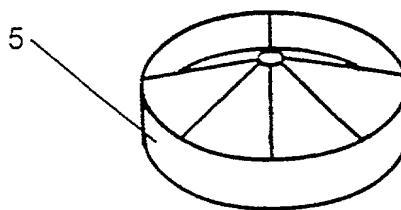
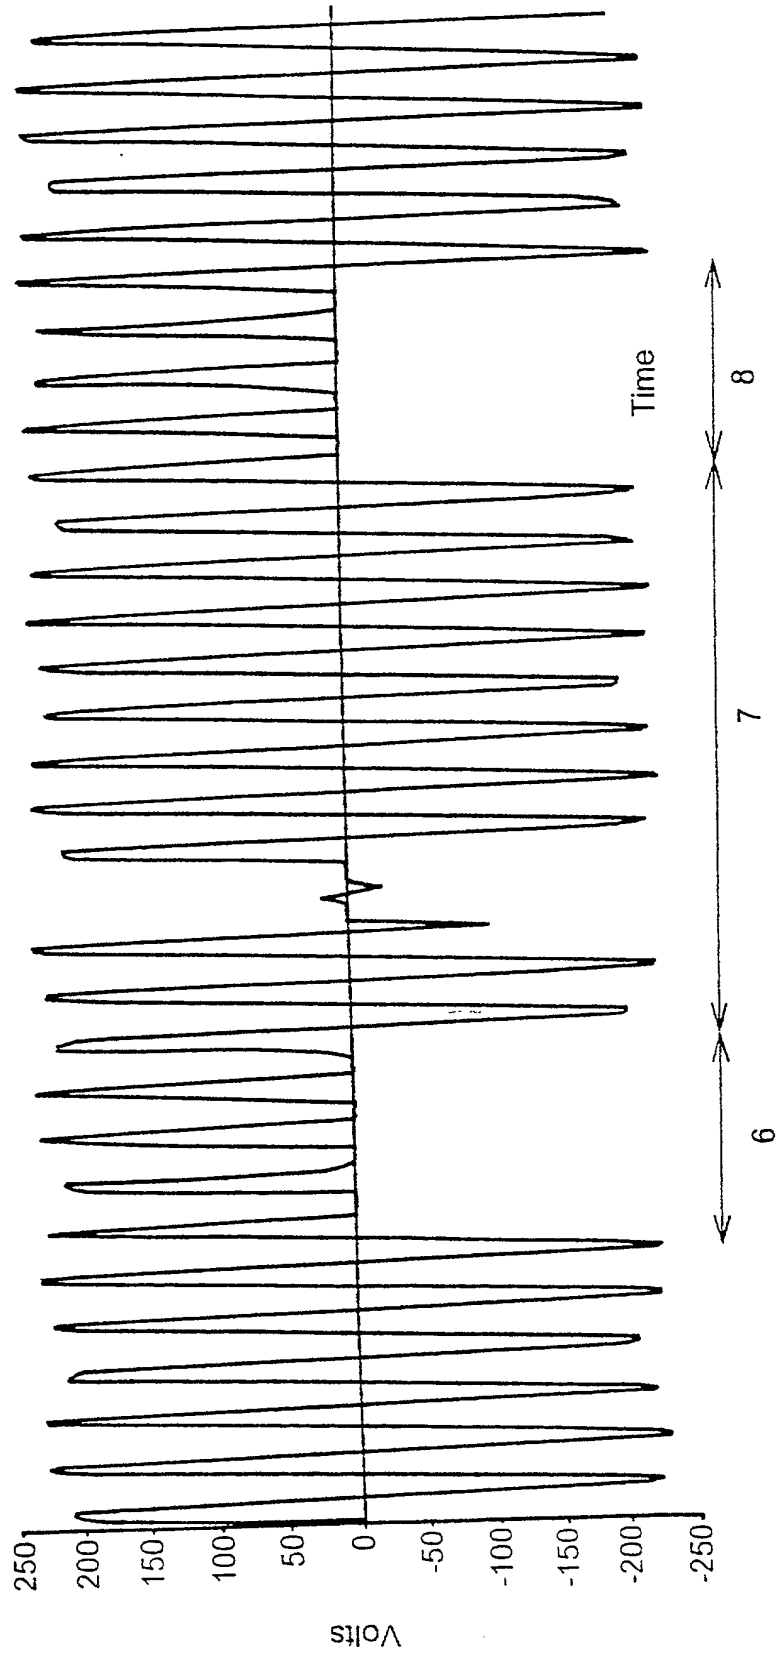
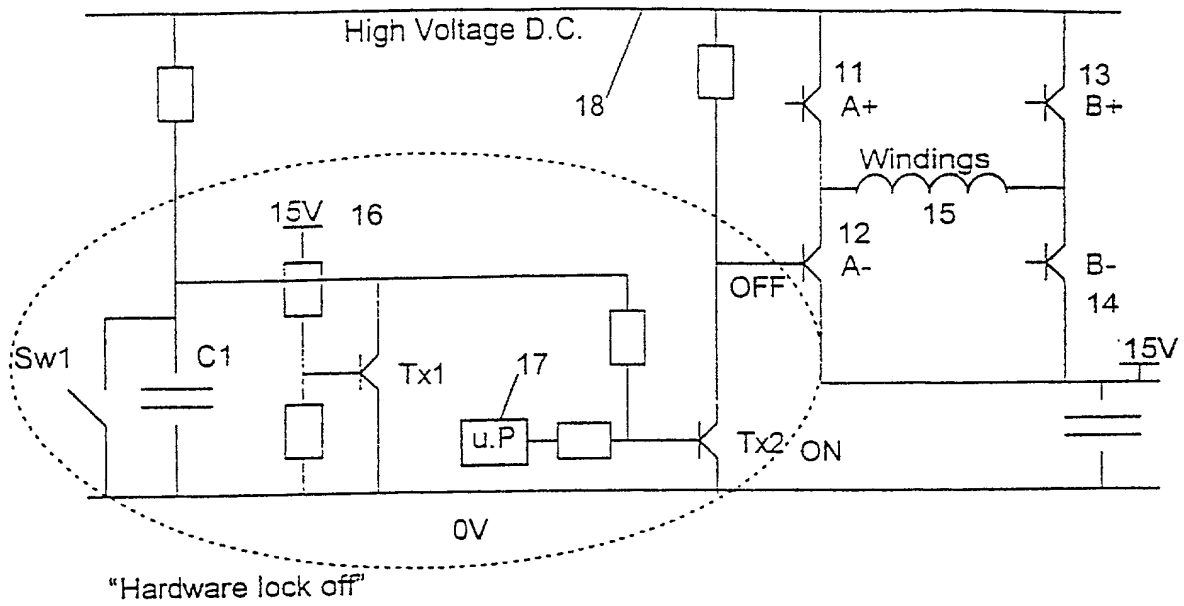
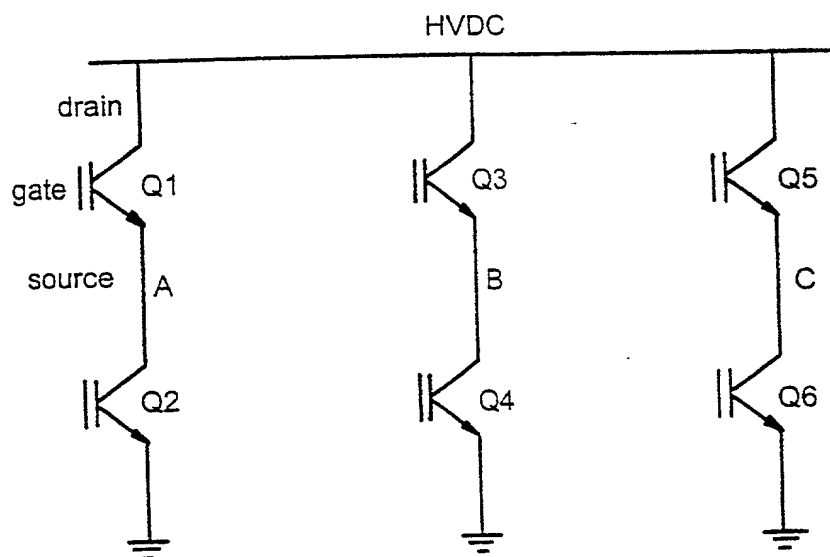
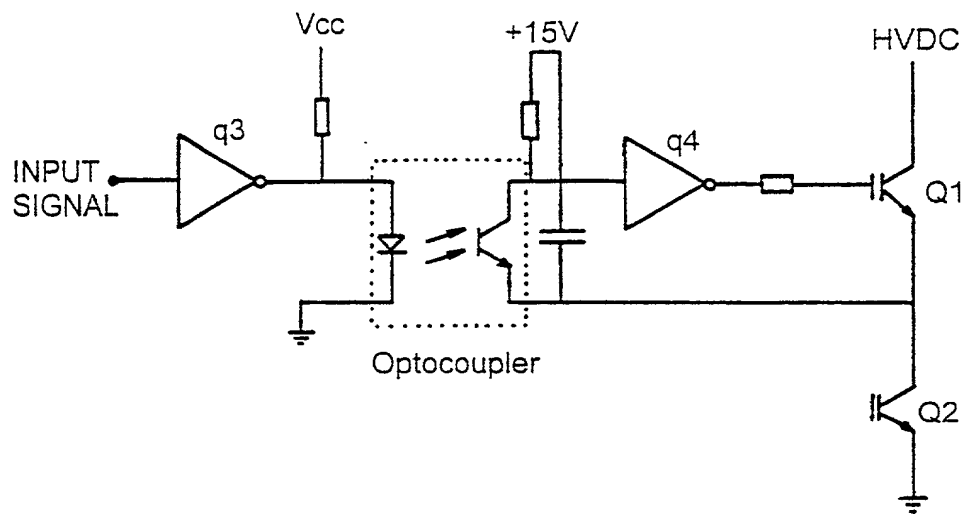
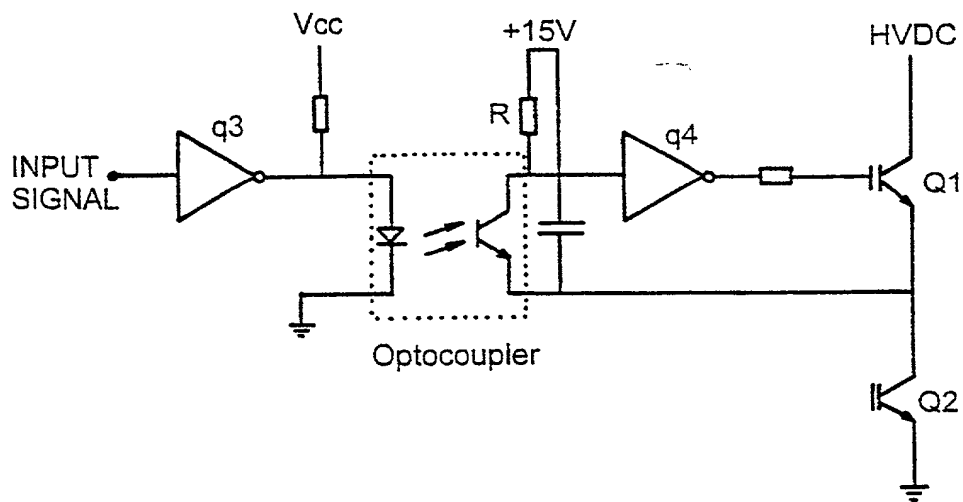
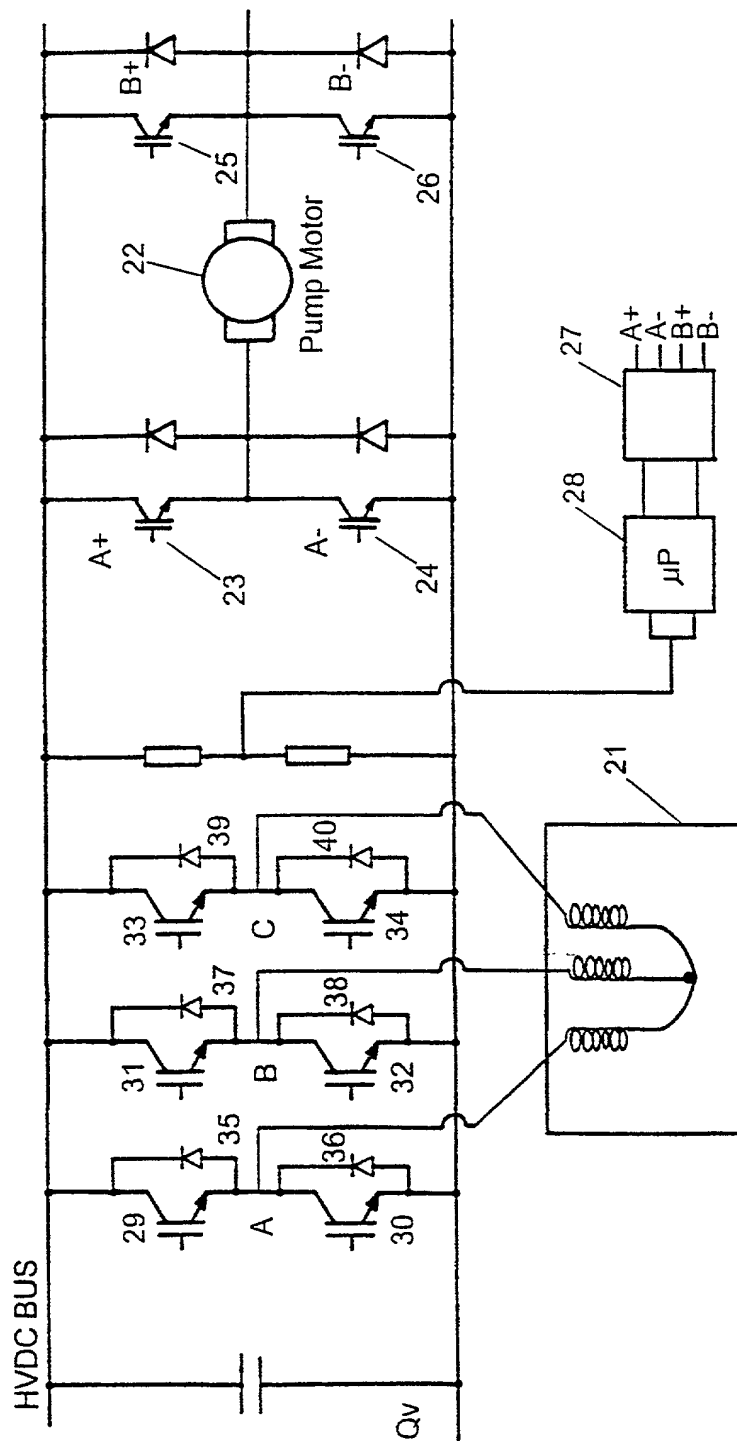


FIG. 2B

**FIG. 3**

**FIG. 4****FIG. 5**

**FIG. 6****FIG. 7**

**FIG. 8**

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **LAUNDRY MACHINE**, the specification of which

(check one) ☐ is attached hereto.
☒ was filed on May 17, 2001 as
 Application Serial No. 09/856,412
 and was amended on _____
 (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
<u>332836</u>	<u>New Zealand</u>	<u>17 November 1998</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
<u>PCT/NZ99/00193</u>	<u>PCT</u>	<u>17 November 1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below; insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Richard Bushnell, Reg. 16,943; Richard A. Giangiorgi, Reg. 24,284; Raiford A. Blackstone, Jr., Reg. 25,156; David J. Marr, Reg. 32,915; Linda L. Palomar, Reg. 37,903; James R. Foley, Reg. 39,979; James A. O'Malley, Reg. 45,952 and Paige A. Kitzinger, Reg. 45,219.

SEND CORRESPONDENCE TO: TREXLER, BUSHNELL, GIANGIORGI, BLACKSTONE & MARR, LTD.
105 W. ADAMS STREET, CHICAGO, IL 60603

DIRECT TELEPHONE CALLS TO: (312) 704-1890 RAIFORD A. BLACKSTONE, JR.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor ADAM JOHN DARBY
 Inventor's signature [Signature] Date 5/7/01
 Residence AUCKLAND, NEW ZEALAND
 Citizenship NEW ZEALAND
 Post Office Address 2/24 Regia Close, Bucklands Beach, AUCKLAND, NEW ZEALAND

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

2-00 Full name of second inventor IAN CAMPBELL MCGILL
Inventor's signature [Signature] Date 9-7-01
Residence AUCKLAND, NEW ZEALAND NZX
Citizenship NEW ZEALAND
Post Office Address 88 Kohimarama Road, Kohimarama, AUCKLAND, NEW ZEALAND

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

3-00 Full name of third inventor LORRAINE NEVINSON
Inventor's signature [Signature] Date 10-7-01
Residence AUCKLAND, NEW ZEALAND NZX
Citizenship NEW ZEALAND
Post Office Address 9 Alexander Avenue, Maraetai, AUCKLAND, NEW ZEALAND

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

4-00 Full name of fourth inventor LAURENCE EVAN SMYTHE
Inventor's signature [Signature] Date 12/3/01
Residence AUCKLAND, NEW ZEALAND NZX
Citizenship NEW ZEALAND
Post Office Address 55 Corania Crescent, Lynfield, AUCKLAND, NEW ZEALAND

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

5-00 Full name of fifth inventor SAMUEL JOHN SELWYN TAYLOR
Inventor's signature [Signature] Date 30/07/01
Residence AUCKLAND, NEW ZEALAND NZX
Citizenship NEW ZEALAND
Post Office Address 9 Woodbine Avenue, Greenlane, AUCKLAND, NEW ZEALAND

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

6-00 Full name of sixth inventor NEIL CHEYNE
Inventor's signature [Signature] Date 3/6/01
Residence AUCKLAND, NEW ZEALAND NZX
Citizenship NEW ZEALAND
Post Office Address 8 Annagarz Rise, Howick, AUCKLAND, NEW ZEALAND

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

7-00 Full name of seventh inventor JONATHAN DAVID HARWOOD
Inventor's signature [Signature] Date 5/7/01
Residence AUCKLAND, NEW ZEALAND NZX
Citizenship NEW ZEALAND
Post Office Address 10B Halsey Road, Manurewa, AUCKLAND, NEW ZEALAND